


Alternator regulator

A fully charged car battery is essential if a vehicle is to function trouble-free. The alternator regulator must monitor and control the process to charge the battery. It must also ensure that all...

Function

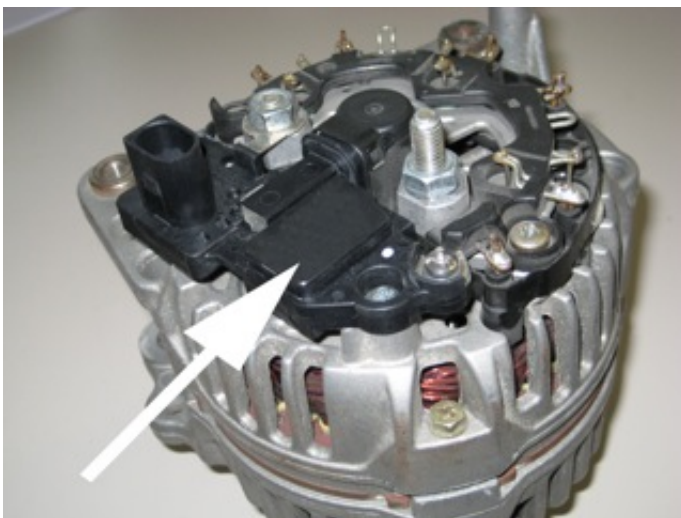

A fully charged car battery is essential if a vehicle is to function trouble-free. The alternator regulator must monitor and control the process to charge the battery. It must also ensure that all power loads in the vehicle have sufficient energy to function. The alternator control is usually a component of the alternator. Due to the different power ratings of alternators and the large number of alternator manufacturers, there are now several hundred different types of regulator.

Current measurement

The current flowing through the rotating solenoid (rotor) is the decisive factor for regulating the output generated by the alternator. This current is used to alter the magnetic field. It is controlled by the alternator regulator based on the battery voltage, which has been measured in advance. This measurement process is repeated up to several hundred times a second so that a change in charge at the battery can be compensated very quickly.

The voltage generated by the alternator must be higher than the battery voltage. Depending on the vehicle manufacturer's specifications, the alternator will have a control voltage of between 14 and 15 V for passenger cars and between 28 and 29 V for trucks and HGVs.

Rather than varying the current in the rotor in the same way, the regulator uses a process of switching the current on and off for different lengths of time (duty cycle). So, if the current is switched on for a prolonged period and is off only for a short time during a control phase, the alternator will supply a high

output. Conversely, the output from the alternator will be low if the regulator only switches the current on for a short time and leaves it off for a prolonged period.

The alternator regulator also automatically adapts the battery charge to the ambient temperature. This is necessary because the charge characteristics of the car battery are not the same at $-20\text{ }^{\circ}\text{C}$, for example, as they are at $+30\text{ }^{\circ}\text{C}$. The regulator takes care of the need to adapt the battery charge automatically with a charging curve which is specified in the data sheets as a temperature coefficient.

Other functions

Additional functions going beyond the charging of the battery were first added to the remit of alternator regulators around 15 years ago. For example:

Starting

The alternator remains switched off initially when the engine starts up. Only once the engine is running is the output from the alternator increased. This process takes between 2 and 10 seconds to complete and follows a slowly ascending charging curve. This helps starting at cold temperatures in particular or if the battery charge is low.

Minimising the mechanical stress

The regulator also minimises the mechanical stress placed on

- the drive belts,
- the bearings and
- the tensioning pulley of the alternator.

Mechanical stress occurs when there is a change in load due to loads in the vehicle being switched on or off (e.g. the headlights, heated seats, etc.). Every time there is a change in load, the alternator regulator regulates the alternator output to the setpoint following a slowly ascending or descending charging curve. Without this function, the entire output requirement would change within a tenth of a second.

A trend has developed recently whereby in many vehicles, it is not the alternator regulator which monitors the battery voltage but the engine control unit. The engine control unit is connected to the alternator regulator either with a separate cable or via the bus system. It controls the regulator using many different factors. In cases like these the regulator simply functions as a straightforward on/off switch.

Safety

The safe power supply of the vehicle electrical system can only be assured if the alternator regulator can be relied upon to perform its function. The alternator regulator is exposed to significant external influences and mechanical wear.

- High temperature differences,
- moisture,

- aggressive fluids such as salt water,
- cleaning agents

and so on must not be able to harm the alternator regulator. It is for this reason that using only suitable materials and providing the electronics with absolute protection against moisture are given priority as early as the design stage.

Environmental protection

Modern alternator regulators relieve the load on the engine during the start phase, thereby contributing to a reduction in harmful exhaust gas components during starting. They also play their part in keeping the start phase very short with a well charged battery and reducing the impact on the environment.

Depreciation

Alternator controllers are maintenance-free and have long service lives. Despite this, electronics are repeatedly damaged beyond repair due to temperatures that are too high or moisture getting into the housing through hairline cracks.

Similarly, the carbon brushes that are required for contact with the rotor suffer mechanical wear. There is a copper slip ring on the rotor. The carbon brushes are pressed onto the slip ring by means of spring force. The carbon brushes are worn away by the constant rotation of the slip ring. Experience has shown that carbon brushes on older vehicles last approx. 110,000 to 130,000 km and more than 200,000 km on newer vehicles.

To avoid the alternator failing, the carbon brushes should be checked during regular services and replaced in good time. In most cases, the entire alternator is replaced.

Bilder

Hersteller



DENSO Aftermarket



Valeo_EN



BOSCH
Invented for life

Bosch



HÜCO



Febi_EN



HELLA



Herth+Buss



Magneti Marelli_EN

Quelle:

<http://www.my-cardictionary.com><https://www.my-cardictionary.com/cardictionary/hybrid/products/alternator-regulator.html>